


# RCL GENERATORS

24–60 kW



**KOHLER**<sup>®</sup>

**KOHLER**<sup>®</sup>  
IN POWER. SINCE 1920.

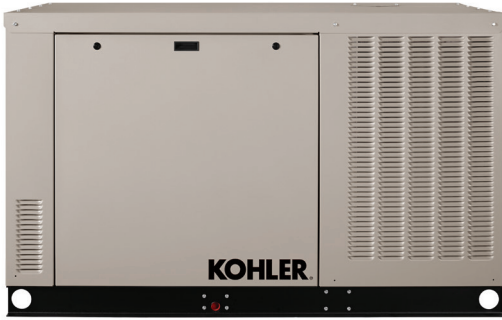

Exceptionally powerful, surprisingly quiet. Whatever the size of your home or business, there's a reliable RCL generator to match. These five models feature robust 1800-rpm liquid-cooled engines and patented technology that keeps sound levels to a minimum. And now there's a 30-kW model to round out the lineup.

### Quality—Backed With a Long Warranty

Every KOHLER® generator is meticulously quality-tested for total reliability. It comes with our 5-year, 2,000-hour limited warranty, plus a corrosion-resistant aluminum enclosure that's built to last.

### Extremely Quiet Operation

Patented technology makes operations and weekly exercise surprisingly quiet and neighborhood-friendly, with sound levels similar to a typical central air conditioner and as quiet as a normal conversation.

### Protect Your Electronics

Outstanding voltage and frequency regulation and ultra-low levels of harmonic distortion provide high-quality power that won't harm sensitive electronics or expensive appliances.

### Easier Installation and Maintenance

An easier install means a faster install. A simple terminal block helps streamline your dealer's installation, and single-side service makes these generators easy to maintain.

### Compatible With Advanced Options

Models are equipped with an RDC2 controller to manage both the generator and the transfer switch. The RDC2 is compatible with the Power Relay Module, Programmable Interface Module, and OnCue® Plus Generator Management System.

### NFPA Reduced

RCL models designated below can be installed 18 inches from any structure, providing flexibility for installation on your property.

	24 kW	30 kW	38 kW	48 kW	60 kW
<b>Model Number</b>	24RCLA	30RCLA	38RCLC	48RCLC	60RCLB
<b>Rated Power (kW) LPG (Liquid Propane)/NG (Natural Gas)</b>	24/21	30/30	38/38	48/48	60/60
<b>Voltage @ 60 Hz Single-Phase</b>	120/240				
<b>Amps LPG/NG @ 240 V Single-Phase</b>	100/87	125/125	158/158	200/200	250/250
<b>Engine/Alternator RPM</b>	1800				
<b>Three-Phase Available</b>	Yes				
<b>Engine</b>	2.2 L	2.2 L Turbo		6.2 L	
	39 HP	64 HP	75 HP	103 HP	
	KOHLER KG2204 Naturally Aspirated	KOHLER KG2204T Turbo		KOHLER KG6208 Naturally Aspirated	
	In-Line 4			V-8	
	Hydraulic Valve Lifters				
<b>Peak Motor Starting kVA at 240 V (35% dip for voltages below)</b>	37	44	74	113	144
<b>Fuel</b>	LPG/NG				
<b>Engine Cooling</b>	Liquid-Cooled				
<b>Enclosure</b>	Corrosion-Resistant Aluminum				
<b>Average Sound Output dBA at 23 Ft (During Exercise/Normal Operation)*</b>	55/61	54/62		60/61	
<b>Single-Point Sound Output dBA at 23 Ft (During Exercise/Normal Operation)†</b>	52/60	52/60		57/61	
<b>Dimensions (L x W x H)</b>	74" x 34" x 45"			90" x 34" x 45"	
<b>Digital Voltage Regulation</b>	+/- 1.0%				
<b>Warranty</b>	5-Year Limited				

\*8-point logarithmic average

†Lowest of 8 points around the generator as compared to competitor ratings. Sound levels at other points around generator may vary depending on installation parameters