

Day-Brite

CFI

by  Signify

Recessed

FluxPanel gen 2

Flat panel luminaires

interact
ready.




Even illumination, now at the right price



The unfailing choice for lasting confidence

- Help bolster wellbeing and productivity without worrying about flicker and other undesired effects.
- Immerse users in comfortable, welcoming spaces that are free of glare and distractions; with color that remains consistent across luminaires and over time.
- Rely on one flat panel LED luminaire family for multiple applications - recessed, surface, or suspended.
- Maximize your investment with rebate eligible panels in both DLC standard and premium categories (see the DLC QPL list for exact catalog numbers www.designlights.org/QPL).

Affordable doesn't have to mean cheap

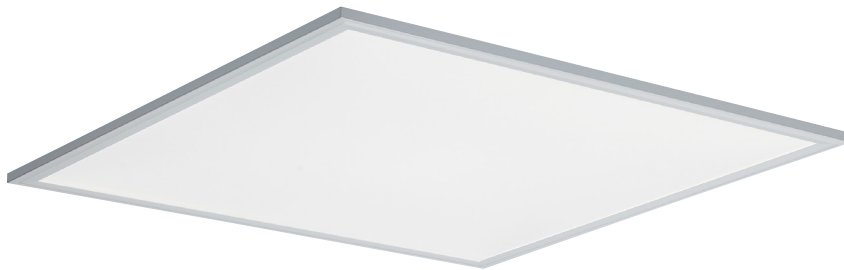

Why risk the unknown, and your reputation, for the sake of short-term savings?

FluxPanel luminaires are in their second generation, which means more experience behind the product. Backed with more than 125 years of lighting expertise, Day-Brite has the knowledge and expertise to bring you a panel that you can count on.

With DLC standard and DLC Premium versions available, there's a panel for every project and every budget. Maximize your rebate potential with the configuration that suits your energy and lighting needs best.

FluxPanel luminaires are ideal for office, healthcare and educational facilities that seek to minimize hassles, meet sustainability goals, and maximize return on investment.

When a good deal matters, put your trust in FluxPanel luminaires.

Visit www.day-brite.com.

FPZ FluxPanel LED gen 2

Ordering guide – Standard configurations available with all choices, unless otherwise noted.

Base configurations selections indicated by blue.

Example: 2FPZ38L840-2-DS-UNV-DIM-BSL10LST

| Width | Family | Nominal delivered lumens | Color | Length | Diffuser | Voltage | Driver | Options ² |
|--------------------------|---------------|--|---|--------------------------|---------------------|---|--|---|
| <input type="checkbox"/> | FPZ | | - | <input type="checkbox"/> | DS | - | - | |
| 1 1' | FPZ FluxPanel | Standard configurations 2x2 20L ⁴ 2000 lumens 30L 3000 lumens 38L 3800 lumens 45L 4500 lumens 2x4 15L ⁴ 1500 lumens 30L 3000 lumens 38L 3800 lumens 43L 4300 lumens 48L 4800 lumens 54L 5400 lumens 60L 6000 lumens 1x4 15L ⁴ 1500 lumens 30L 3000 lumens 38L 3800 lumens 45L 4500 lumens Base configuration⁴ 2x2 38B 3800 lumens 2x4 42B 4200 lumens 1x4 38B 3800 lumens | 835 80 CRI, 3500K 840 80 CRI, 4000K 850 80 CRI, 5000K | 2 2' 4 4' | DS Diffuse (smooth) | UNV Universal Voltage, 120-277 volt 120 ³ 120V 277 ³ 277V 347 347V | DIM ¹ 0-10V dimming SDIM ⁷ Step dimming to 40% input power XDIM ^{3,7} MarkX phase dimming | F1 3/8" flex, 3 wire 18 gauge 6' F2 3/8" flex, 4 wire 18 gauge 6' F1/D 3/8" twin flex, 3 wire 18 gauge 6' for dimmable luminaires F2/5W 3/8" single flex, 5 wire 18 gauge 6' for dimmable luminaires F2/6W 3/8" single flex, 6 wire 18 gauge 6' or dimmable and emergency luminaires GLR Fusing, fast blow BSL10LST ⁶ Bodine 10W battery pack BSL6LST ⁶ Bodine 6W battery pack DSC Quick driver disconnect CHIC Chicago Plenum rated IAP ^{4,5,8} Integral Interact Pro RF sensor, enables network lighting control SWZDTRM ^{4,8} Remote sensor, daylighting and occupancy, advanced grouping with dwell time |

Footnotes:

- 0-10V dimming to 1% for Standard, and 5% for Base configurations
- All options available with Standard configurations only
- Requires 120V or 277V specification
- Specify DIM driver option only
- Integral IAP option dimmable to 5% via wireless wall switch
- Not available with 347V option
- Available with 54L package and lower
- Not available with surface or suspended accessories
- Maximum of 4 luminaires per controller

Accessories (order separately)

- FMA22 – 2'x2' "F" mounting frame for NEMA "F" mounting
- FSK22 – 2'x2' surface mount field installation kit(factory welded seams)
- FSF22 – 2'x2' surface mount field assembly kit (field assembled)
- FMA24 – 2'x4' "F" mounting frame for NEMA "F" mounting
- FSK24 – 2'x4' surface mount field installation kit (factory welded seams)
- FSF24 – 2'x4' surface mount field assembly kit (field assembled)
- FMA14 – 1'x4' "F" mounting frame for NEMA "F" mounting
- FSK14 – 1'x4' surface mount field installation kit (factory welded seams)
- FSF14 – 1'x4' surface mount field assembly kit (field assembled)
- FPZCH48-ID-SC – adjustable cable hanger kit with straight white 18/5 cord for dimming (two-1 powered, 1 non-powered)
- SWZDT^{4,8,9} – SpaceWise wireless controller with daylighting and occupancy, advanced grouping with dwell time functionality (compatible with all 0-10V options, see spec sheet https://bit.ly/SWZDT_accessory)

